



中国国家强制性产品认证证书

证书编号: 2021012313369924

发证日期: 2023年03月30日

有效期至: 2026年02月10日

认证委托人名称 胡默尔股份公司
及注册地址 德国, 登茨林根 (79211), 莉丝·迈特纳大街 2 号

产品生产者名称 胡默尔股份公司
及注册地址 德国, 登茨林根 (79211), 莉丝·迈特纳大街 2 号

生产企业名称 胡默尔股份公司
及生产地址 德国, 登茨林根 (79211), 莉丝·迈特纳大街 2 号

产品名称和系列、规格、型号 电缆引入装置
型号: EXIOS BARRIER □□; 防爆标志: Ex db I Mb; Ex eb I Mb; Ex db IIC Gb; Ex eb IIC Gb; Ex ta IIIC Da; 可代表螺纹规格及相关文件编号详见附件。

产品标准和
技术要求 GB/T 3836.1-2021;GB/T 3836.2-2021;GB/T 3836.3-2021;GB/T 3836.31-2021

上述产品符合 CNCA-C23-01:2019 认证规则的要求, 特发此证。
证书有效期内本证书的有效性依据发证机构的定期监督获得保持。
本证书为变更证书, 证书首次颁发日期: 2021 年 02 月 10 日

可通过扫描下方二维码或登录国家认监委网站 (www.cnca.gov.cn) 查验证书信息



签发:

谢肇煦



中国质量认证中心





CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

CERTIFICATE NO.: 2021012313369924

Valid from: Mar.30,2023

Valid until: Feb.10,2026

NAME AND REGISTERED ADDRESS OF THE APPLICANT HUMMEL AG
Lise-Meitner-Strasse 2, 79211 Denzlingen, Germany

NAME AND REGISTERED ADDRESS OF THE MANUFACTURER HUMMEL AG
Lise-Meitner-Strasse 2, 79211 Denzlingen, Germany

NAME AND LOCATION OF THE FACTORY HUMMEL AG
Lise-Meitner-Strasse 2, 79211 Denzlingen, Germany

PRODUCT MODEL(S) Cable gland
Type of Product: EXIOS BARRIER □□; Marking: Ex db I Mb; Ex eb I Mb; Ex db IIC Gb; Ex eb IIC Gb; Ex ta IIIC Da; The thread specification and related document numbers can be seen in the appendix.

STANDARDS AND TECHNICAL REQUIREMENTS GB/T 3836.1-2021;GB/T 3836.2-2021;GB/T 3836.3-2021;GB/T 3836.31-2021

This is to certify that the above mentioned product(s) complies with the requirements of implementation rules for compulsory certification(REFNO. CNCA-C23-01:2019)

The validity of the certificate is subject to positive result of the regular follow up inspection by issuing certification body until the expiry date.

Date of original issued: Feb.10,2021

The certificate information is available through the QR code below or CNCA's website: www.cnca.gov.cn



SIGNATURE:

谢肇煦



CHINA QUALITY CERTIFICATION CENTRE





中国国家强制性产品认证证书

证书编号: 2021012313369924

第 1 页 / 共 1 页


本证书及附件应同时使用, 信息查验说明见证书页

纸号: 3187634

1. 总装配图纸号、可代表螺纹规格及对应防爆标志:

序号	防爆标志	螺纹规格	外壳防护等级	总装配图
1	Ex db I Mb Ex eb I Mb	M20×1.5/M25×1.5/M32×1.5/M40×1.5/ M50×1.5/M63×1.5/M75×1.5	IP66/IP68	PROFILEID80421
		NPT1/2", NPT3/4", NPT1", NPT1 1/4", NPT1 1/2", NPT2", NPT2 1/2", NPT3"		PROFILEID80418
	Ex db IIC Gb Ex eb IIC Gb	M16×1.5/M20×1.5/M25×1.5/M32×1.5/ M40×1.5/M50×1.5/M63×1.5/M75×1.5	IP66/IP68	PROFILEID80421
	Ex ta IIIC Da	NPT3/8", NPT1/2", NPT3/4", NPT1", NPT1 1/4", NPT1 1/2", NPT2", NPT2 1/2", NPT3"		PROFILEID80418

2. 型号解释:

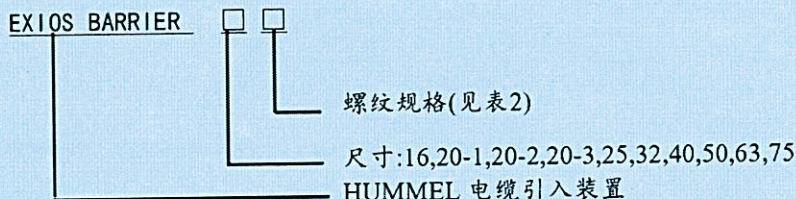

3. 特殊使用条件:

- 3.1 此产品不得用于外壳温度或安装点温度在-60°C至+85°C以外的温度范围;
 - 3.2 接头装配的螺纹应与接头相匹配, 以保证良好的连接、与密封性能;
 - 3.3 此接头未带密封圈时(NPT), 如装配在一个有爆炸性粉尘环境中, 它只适用安装于拥有至少 5 扣螺纹以上的箱体上。
4. 产品结构以认证机构批准的图纸为准。



中国质量认证中心

